


eXtreme® High-Flex Cat 6 Patch Cords

APPLICATION

eXtreme High-Flex Cat 6 Patch Cords are designed to be used in Cat 6 / 1-Gigabit applications and all frequencies from 1 to 250 MHz. Patch cords offer flexible, high-density patching. Cables support high-speed data applications. They reduce patch cord density in a 24-port patch panel by 38 percent when compared to typical Cat 6 patch cords.

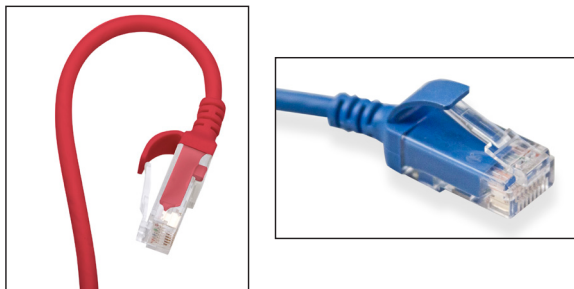

SPECIFICATION

Patch cords shall provide 1 Gigabit application performance for cross connecting in systems comprising of equipment, cable, and appropriate connectors. The patch cords shall be 28-gauge, unshielded, twisted-pair, stranded conductor construction with a standard 8-position modular plug on both ends. Plug contacts shall be plated with minimum of 50 µm of gold and rated to 2,500 mating cycles. Patch cords shall have an outer diameter of 0.15 inches and shall be available in white, yellow, grey, black, red, green, and blue.

WARRANTY INFORMATION

Note: Limited Product and Limited Extended Warranties are rendered VOID if the installed structured cabling system is used for PoE applications that exceed the Product's specified power rating.

For a copy of Leviton product warranties, visit www.leviton.com/warranty.

FEATURES

- Available in white, yellow, grey, black, red, green, and blue
- Available in stock lengths of 6 inches or 1-20 feet in 1-foot increments
- Power over Ethernet (PoE and PoE+) compatible
- Accommodate use in high-density switches, routers, and other electronics
- Bend radius is a narrow 0.60 inches, versus 1.0 inch for typical Cat 6 patch cords
- Snagless plug design with integrated strain-relief boot
- Plug contacts rated to 2,500 mating cycles
- Dual-rated cable jacket (CM/LSZH)

DESIGN CONSIDERATIONS

- Designed to provide connectivity for Cat 6 / 1-Gigabit applications
- Available in a variety of colors for color coding or organization
- Channel Length:
 - Supports 96-meter channels that include 90-meter permanent links
 - Supports 93-meter channels with 10 meters of patch cords included in the channel

STANDARDS COMPLIANCE

- ANSI/TIA-1096-A (formerly FCC Part 68)
- ANSI/TIA-568.2-D
- ISO/IEC 11801
- EN 50173-1
- RoHS compliant
- UL 444 - CM
- IEC 60332-1 [1,2] (2004-07), 60754, 61034
- IEEE 802.3at (Type 1) PoE up to 15.4 watts
- IEEE 802.3at (Type 2) PoE+ up to 30 watts - maximum bundle size of 100 cords
- Supports proposed IEEE 802.3bt Type 3 (24 cables in a bundle) PoE applications

PHYSICAL SPECIFICATIONS

Dimensions:	1-20 feet in 1-foot increments
Materials:	28-gauge, stranded UTP, standard modular non-keyed, 8-position, 8-conductor plug, 94V-0 rated
Cable Outer Diameter:	0.15 inches
Bend Radius:	0.60 inches


COUNTRY OF ORIGIN

China

ELECTRONIC FILES

For CAD files, typical specs, or technical drawings (.DXF, .DWG), visit www.leviton.com.

6H460-XX*

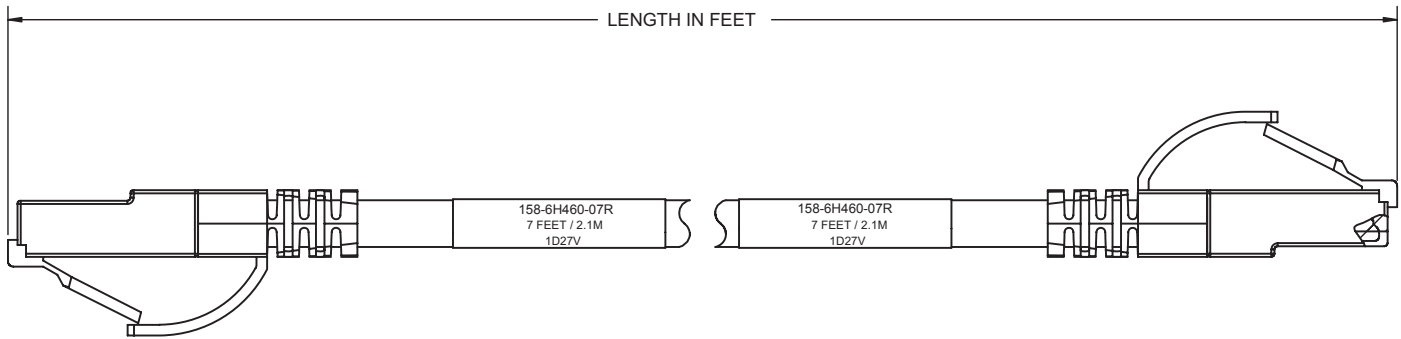

PART NUMBERS

See next page.

Leviton Network Solutions 2222 - 222nd St. SE Bothell, WA 98021-4416	Asia / Pacific T +1.631.812.6228 E infoasean@leviton.com	Canada T +1.514.954.1840 E pcservice@leviton.com	Caribbean T +1.954.593.1896 E infocaribbean@leviton.com	China T +852.2774.9876 E infochina@leviton.com	Colombia T +57.1.743.6045 E infocolombia@leviton.com
tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	Europe T +44.0.1592.772124 E customerserviceeu@leviton.com	India / SAARC T +971.4.886.4722 E infoindia@leviton.com	Mexico T +52.55.5082.1040 E lsamarketing@leviton.com	Middle East & Africa T +971.4.886.4722 E lmeinfo@leviton.com	South Korea T +82.2.3273.9963 E infokorea@leviton.com

EXTREME® HIGH-FLEX CAT 6 PATCH CORDS

Description	White	Yellow	Red	Blue	Green	Grey	Black
High-Flex Cat 6 Patch Cord, 0.5 feet (0.15 m)	6H460-6iW	6H460-6iY	—	6H460-6iL	—	6H460-6iS	—
High-Flex Cat 6 Patch Cord, 1 foot (0.3 m)	6H460-01W	6H460-01Y	6H460-01R	6H460-01L	6H460-01G	6H460-01S	6H460-01E
High-Flex Cat 6 Patch Cord, 2 feet (0.6 m)	6H460-02W	6H460-02Y	6H460-02R	6H460-02L	6H460-02G	6H460-02S	6H460-02E
High-Flex Cat 6 Patch Cord, 3 feet (0.9 m)	6H460-03W	6H460-03Y	6H460-03R	6H460-03L	6H460-03G	6H460-03S	6H460-03E
High-Flex Cat 6 Patch Cord, 4 feet (1.2 m)	6H460-04W	6H460-04Y	6H460-04R	6H460-04L	6H460-04G	6H460-04S	6H460-04E
High-Flex Cat 6 Patch Cord, 5 feet (1.5 m)	6H460-05W	6H460-05Y	6H460-05R	6H460-05L	6H460-05G	6H460-05S	6H460-05E
High-Flex Cat 6 Patch Cord, 6 feet (1.8 m)	6H460-06W	6H460-06Y	6H460-06R	6H460-06L	6H460-06G	6H460-06S	6H460-06E
High-Flex Cat 6 Patch Cord, 7 feet (2.1 m)	6H460-07W	6H460-07Y	6H460-07R	6H460-07L	6H460-07G	6H460-07S	6H460-07E
High-Flex Cat 6 Patch Cord, 8 feet (2.4 m)	6H460-08W	6H460-08Y	6H460-08R	6H460-08L	6H460-08G	6H460-08S	6H460-08E
High-Flex Cat 6 Patch Cord, 9 feet (2.7 m)	6H460-09W	6H460-09Y	6H460-09R	6H460-09L	6H460-09G	6H460-09S	6H460-09E
High-Flex Cat 6 Patch Cord, 10 feet (3.0 m)	6H460-10W	6H460-10Y	6H460-10R	6H460-10L	6H460-10G	6H460-10S	6H460-10E
High-Flex Cat 6 Patch Cord, 11 feet (3.4 m)	6H460-11W	6H460-11Y	6H460-11R	6H460-11L	6H460-11G	6H460-11S	6H460-11E
High-Flex Cat 6 Patch Cord, 12 feet (3.7 m)	6H460-12W	6H460-12Y	6H460-12R	6H460-12L	6H460-12G	6H460-12S	6H460-12E
High-Flex Cat 6 Patch Cord, 13 feet (4.0 m)	6H460-13W	6H460-13Y	6H460-13R	6H460-13L	6H460-13G	6H460-13S	6H460-13E
High-Flex Cat 6 Patch Cord, 14 feet (4.3 m)	6H460-14W	6H460-14Y	6H460-14R	6H460-14L	6H460-14G	6H460-14S	6H460-14E
High-Flex Cat 6 Patch Cord, 15 feet (4.6 m)	6H460-15W	6H460-15Y	6H460-15R	6H460-15L	6H460-15G	6H460-15S	6H460-15E
High-Flex Cat 6 Patch Cord, 16 feet (4.9 m)	6H460-16W	6H460-16Y	6H460-16R	6H460-16L	6H460-16G	6H460-16S	6H460-16E
High-Flex Cat 6 Patch Cord, 17 feet (5.2 m)	6H460-17W	6H460-17Y	6H460-17R	6H460-17L	6H460-17G	6H460-17S	6H460-17E
High-Flex Cat 6 Patch Cord, 18 feet (5.5 m)	6H460-18W	6H460-18Y	6H460-18R	6H460-18L	6H460-18G	6H460-18S	6H460-18E
High-Flex Cat 6 Patch Cord, 19 feet (5.8 m)	6H460-19W	6H460-19Y	6H460-19R	6H460-19L	6H460-19G	6H460-19S	6H460-19E
High-Flex Cat 6 Patch Cord, 20 feet (6.1 m)	6H460-20W	6H460-20Y	6H460-20R	6H460-20L	6H460-20G	6H460-20S	6H460-20E
High-Flex Cat 6 Patch Cord, 25 feet (7.6 m)	—	—	—	6H460-25L	—	—	—
High-Flex Cat 6 Patch Cord, 30 feet (9.1 m)	—	—	—	6H460-30L	—	—	—
High-Flex Cat 6 Patch Cord, 35 feet (10.7 m)	—	—	—	6H460-35L	—	—	—
High-Flex Cat 6 Patch Cord, 40 feet (12.1 m)	—	—	—	6H460-40L	—	—	—
High-Flex Cat 6 Patch Cord, 50 feet (12.1 m)	—	—	—	6H460-50L	—	—	—

Lengths from 3–20 feet are component rated; all other lengths are channel rated
Make-to-order lengths are available from 1-100 feet, in 1-foot increments. Go to Leviton.com/configurator.



Leviton Network Solutions
2222 - 222nd St. SE
Bothell, WA 98021-4416

Asia / Pacific
T +1.631.812.6228
E infoasean@leviton.com

Canada
T +1.514.954.1840
E pcservice@leviton.com

Caribbean
T +1.954.593.1896
E infocaribbean@leviton.com

China
T +852.2774.9876
E infochina@leviton.com

Colombia
T +57.1.743.6045
E infocolombia@leviton.com

tel 1-800-824-3005
tel +1-425-486-2222
appeng@leviton.com
www.leviton.com

Europe
T +44.0.1592.772124
E customerserviceeu@leviton.com

India / SAARC
T +971.4.886.4722
E infoindia@leviton.com

Mexico
T +52.55.5082.1040
E Isamarketing@leviton.com

Middle East & Africa
T +971.4.886.4722
E lmeinfo@leviton.com

South Korea
T +82.2.3273.9963
E infokorea@leviton.com